Baysek PreFeeder/Load Turner

Innovative Load Turning, Squaring, & Rotating Technology



- 180° Load Turn
- 180° Load Rotation
- 3 Side Discharge
- Variable Speed Vibration
- One Operator
- **Easy Touch Control Panel**
- No Pit Required

Features

The "no pit required" standard Baysek Load Turner is 60" x75" with a maximum opening of 54", a Clamp minimum of 34" and 1,500 lbs. lifting capability. Variable speed vibration is optional on all Baysek load turner models for squaring and centering loads as well as removing damaged sheets and dunnage. *Custom builds to specification are available upon request.





The Baysek Model I-6075 offers quick and easy 180 degree load inverting. The Baysek process saves valuable time while adding job safety, avoiding injury caused by manually turning and stacking loads for inspection and production. Originally engineered and manufactured to accompany the Baysek C Series Conveyor In-Feed System, a Baysek Load Turner is an easy addition to any production line.

Rotate

The Baysek Model IR-6075 offers quick and easy 180 degree load rotating and inverting with 3 way discharge. Loads are ready for production on a multi-conveyor selection via an easy touch screen without the use of messy hydraulics. Also built to accompany the Baysek C Series Die Cutters Conveyor In-Feed System, the Baysek model IR can send loads to multiple production lines with the selection of top or bottom sheet side up at discharge.



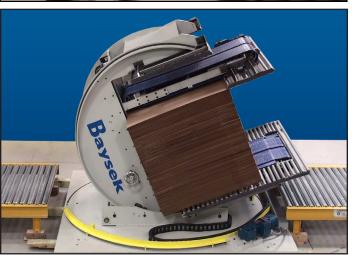

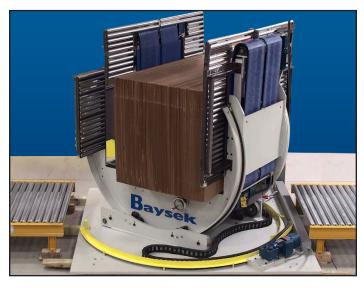

Sheet Size	Maximum		Minimum		Floor	Through	2440 mm	96 in.	
Through	1525 mm	60 in.	510 mm	20 in.		Across	2285 mm	90 in.	Control Cabinet Excluded
Across	1905 mm	75 in.	965 mm	38 in.		Height	2030 mm	80 in.	
Height	1372 mm	54 in.	864 mm	34 in.					
Weight 4309 kg - 9500 lbs. Conveyor Height 343 mm 13.5 in. Electric 360 - 480 Volts / 3 Phase / 50 - 60 Hz / 30 Amps									0 Hz / 30 Amps



24-Hour Technical Service Made in the U.S.A.



